

SANMAC 4571 BAR

DATASHEET

Sanmac 4571 is a titanium-stabilized, molybdenum-alloyed austenitic chromium-nickel steel with improved machinability.

STANDARDS

- ASTM: 316Ti
- UNS: S31635
- EN Number: 1.4571
- W.Nr.: 1.4571

Product standard

- EN 10088-3, EN 10088-5 (dimensions up to 250 mm)
- EN 10272, EN 10222-5, (dimensions \geq 180 mm), AD-2000-W2
- ASTM A479, ASTM A276
- Chemical composition and mechanical properties acc. to ASTM A182

Approvals

- TÜV AD Merkblatt W0/TRD 100
- Pressure Equipment Directive (2014/68/EU)
- Pre-approval for PMA

Certificate

Status according to EN 10 204/3.1

CHEMICAL COMPOSITION (NOMINAL)

Chemical composition (nominal) %

| C | Si | Mn | P | S | Cr | Ni | Mo |
|------|-----|-----|--------------|--------------|----|----|-----|
| 0.03 | 0.4 | 1.8 | \leq 0.045 | \leq 0.030 | 17 | 11 | 2.1 |

Ti=>5xC

MECHANICAL PROPERTIES

Bar steel is tested in delivery condition.

At 20°C (68°F)

Metric units

| Proof strength | Tensile strength | Elong. | Contr. | HB |
|----------------|------------------|--------|--------|----|
|----------------|------------------|--------|--------|----|

| | | | | | |
|---------------------------------|---------------------------------|----------------|-----------------|-----|------|
| R _{p0.2} ^{a)} | R _{p1.0} ^{a)} | R _m | A ^{b)} | Z | |
| MPa | MPa | MPa | % | % | |
| ≥210 | ≥245 | 515-700 | ≥40 | ≥45 | ≤215 |

Imperial units

| | | | | | | |
|---------------------------------|---------------------------------|------------------|-----------------|--------|--------|------|
| Proof strength | | Tensile strength | | Elong. | Contr. | HB |
| R _{p0.2} ^{a)} | R _{p1.0} ^{a)} | R _m | A ^{b)} | Z | | |
| ksi | ksi | ksi | % | % | | |
| ≥30.5 | ≥35.5 | 75-101.5 | ≥40 | ≥45 | | ≤215 |

1 MPa = 1 N/mm²

a) R_{p0.2} and R_{p1.0} correspond to 0.2% offset and 1.0% offset yield strength respectively.

b) Based on $L_0 = 5.65 \sqrt{S_0}$ where L_0 is the original gauge length and S_0 the original cross-section area.

Impact strength

Due to its austenitic microstructure, Sandvik SANMAC 4571 has very good impact strength both at room temperature and at cryogenic temperatures.

Tests have demonstrated that the steel fulfils the requirements (60 J (44 ft-lb) at -196 °C (-320°F)) according to the European standards prEN13445-2(UFPV-2) and EN 10272.

At high temperatures

Metric units

| Temperature | Proof strength | | Tensile strength |
|-------------|-------------------|-------------------|------------------|
| | R _{p0.2} | R _{p1.0} | R _m |
| °C | MPa | MPa | MPa |
| | min. | min. | min. |
| 100 | 185 | 215 | 440 |
| 200 | 165 | 192 | 390 |
| 300 | 145 | 175 | 375 |
| 400 | 135 | 164 | 375 |
| 500 | 129 | 158 | 360 |

Imperial units

| Temperature | Proof strength | | Tensile strength |
|-------------|-------------------|-------------------|------------------|
| | R _{p0.2} | R _{p1.0} | R _m |
| °F | ksi | ksi | ksi |
| | min. | min. | min. |
| 200 | 26.8 | 31.2 | 63.8 |
| 400 | 23.9 | 27.8 | 56.6 |
| 600 | 21.0 | 25.4 | 54.4 |
| 800 | 19.6 | 23.8 | 54.4 |
| 1000 | 18.7 | 22.9 | 52.2 |

WELDING

The weldability of Sanmac 4571 is good. Suitable methods of fusion welding are manual metal-arc welding (MMA/SMAW) and gas-shielded arc welding, with the TIG/GTAW method as first choice.

Since this material is alloyed in such a way to improve its machinability, the amount of surface oxides on the welded beads might be higher compared to that of the standard 316Ti steels.

This may lead to arc instability during TIG/GTAW welding, especially welding without filler material. However, the welding behavior of this material is the same as for standard 316Ti steels when welding with filler material.

For Sanmac 4571, heat input of <1.5 kJ/mm and interpass temperature of <100°C (210°F) are recommended. Preheating and post-weld heat treatment are normally not necessary.

Recommended filler metals

TIG/GTAW or MIG/GMAW welding

ISO 14343 S 19 12 3 Nb / AWS A5.9 ER318 (e.g. Exaton 19.12.3.Nb)

ISO 14343 S 19 12 3 L / AWS A5.9 ER316L (e.g. Exaton 19.12.3.L)

MMA/SMAW welding

ISO 3581 E 19 12 3 Nb R / AWS A5.4 E318-16

ISO 3581 E 19 12 3 L R / AWS A5.4 E316L-17(e.g. Exaton 19.12.3.LR)

MACHINING

SANMAC stands for Sandvik Machinability Concept. In SANMAC materials, machinability has been improved without jeopardizing properties such as corrosion resistance and mechanical strength.

The improved machinability is owing to:

- Optimized non-metallic inclusions
- Optimal chemical composition
- Optimized process and production parameters

Detailed recommendations for the choice of tools and cutting data regarding turning, thread cutting, parting/grooving, drilling, milling and sawing are provided in the brochure S-02909-ENG.

The diagram shows the ranges within which data should be chosen in order to obtain a tool life of minimum 10 minutes when machining SANMAC 4571.

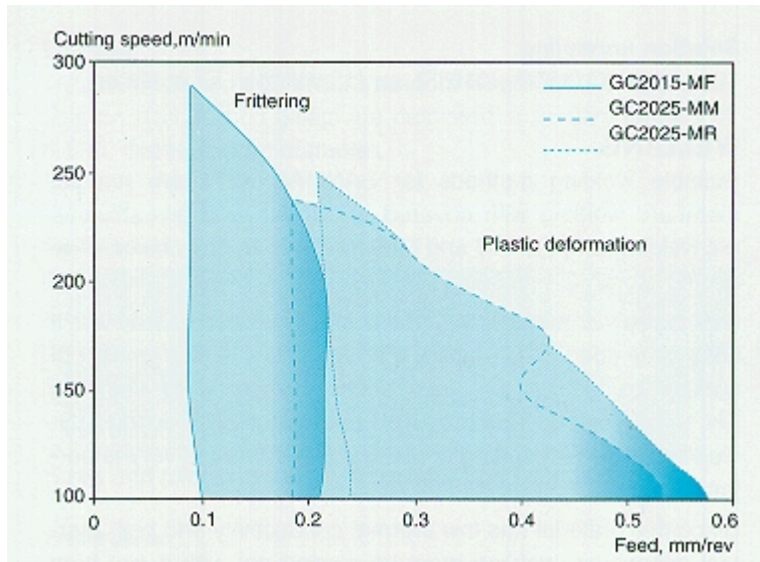


Figure 1. Machining chart Sandvik SANMAC 4571.

The ranges are limited in the event of low feeds because of unacceptable chip breaking. In the case of high cutting speeds, plastic deformation is the most dominant cause of failure. When feed increases and the cutting speed falls, edge frittering (chipping) increases significantly. The diagram is applicable for short cutting times. For long, continuous cuts, the cutting speeds should be reduced somewhat.

The lowest recommended cutting speed is determined by the tendency of the material to stick to the insert (built-up-edge), although the integrity of insert clamping and the stability of the machine are also of great significance.

It is important to conclude which wear mechanism is active, in order to optimize cutting data with the aid of the diagram.

The lowest recommended cutting speed is determined by the tendency of the material to stick to the insert (built-up-edge), although the integrity of insert clamping and the stability of the machine are also of great significance.

It is important to conclude which wear mechanism is active, in order to optimise cutting data with the aid of the diagram.

Turning of Sandvik SANMAC 4571

Recommended insert and cutting data (starting values for a tool-life of 15 minutes)

| Insert Geometry | Grade | Cutting data | Cutting speed | Application | |
|--------------------|--------|-----------------|------------------|--|--|
| | | Feed | | | |
| | | mm/rev | m/min | | |
| MF | GC2015 | 0.15 | 240 | Finishing, copy turning | |
| MM | GC2025 | 0.25 | 200 | Medium machining | |
| MR | GC2025 | 0.30 | 180 | Medium-to-rough machining under less stable conditions | |

Drilling of Sandvik Sanmac

The recommended methods for drilling give the most cost effective results for the respective diameter ranges.

When producing holes with diameters larger than 58 mm, short-hole drilling is used up to 58 mm, followed by internal turning up to the desired diameter. Cutting data for internal turning should be chosen in accordance with the turning recommendations. The recommendations for drilling are applicable for a tool-life of 30 minutes.

Drilling with Sandvik Coromant Delta C drill, diameter 3 - 12.7 mm

Code R415.5. Grade GC1220
(diameter range 3 - 20 mm)

| Cutting data, Feed* | Cutting speed | Application |
|---------------------|---------------|-------------------------|
| mm/rev | m/min | |
| 0.08-0.22 | 55 | Finishing, copy turning |

* The lower value should be selected for smaller diameters

Short hole drilling, diameter 12.7-58 mm

Coromant U-drill, R416.2

| Insert Geometry | Grade* | Cutting data Feed | Cutting speed | Application |
|-----------------|----------------------------|-------------------|---------------|------------------------|
| | | mm/rev | m/min | |
| -53 | Central insert GC1020 | - | - | - |
| -53 | Peripheral insert GC1020** | 0.04-0.18 | 160 | Less stable conditions |
| -53 | Peripheral insert GC3040 | 0.04-0.18 | 200 | Stable conditions |

* Sandvik Coromant inserts

** GC1120 for diameters below 17.5 mm

Drilling with high speed steel (HSS) drills

(diameter 1-3 mm)

| Cutting data, Feed* | Cutting speed** |
|---------------------|-----------------|
| mm/rev | m/min |
| 0.03-0.09 | 10-15 |

* The lower feed value should be selected for smaller diameters

** The higher cutting speed should be selected for coated drills

Disclaimer: Recommendations are for guidance only, and the suitability of a material for a specific application can be confirmed only when we know the actual service conditions. Continuous development may necessitate changes in technical data without notice. This datasheet is only valid for Sandvik materials.