



SANDVIK FORMULA GREEN WELD FINISHING


DATASHEET

Sandvik Formula Green is an effective multipurpose pickling paste, virtually free from formation of toxic nitric gases, used for post-weld treatment of stainless steel welds. Stainless steels are pickled in order to refurbish the weld's surface finish by removing welding oxide, heat tint or scale formed during fabrication.

Compared with conventional pickling pastes, Sandvik Formula Green gives 85% less discharge of dangerous nitrate and nitrite ions to waste water. This pickling paste releases 80–85% less toxic, nitric fumes during the pickling process and is therefore more operator friendly than other pickling pastes that generate fairly evil-smelling nitrous compounds.

Sandvik Formula Green is rapid and economical to use, as only a thin film of the pickling paste is required for a perfect result. The pickling paste has excellent adhesion and can be applied on vertical surfaces and ceilings without any risk of running or drying.

APPLICATIONS

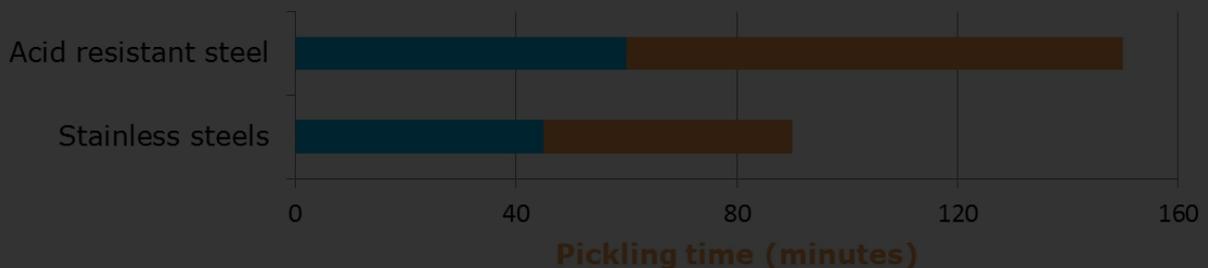

FORMS OF SUPPLY

Sandvik Formula Green is supplied in a 1 kg or 2 kg polyethylene container supplied in a 4-pack fiberboard box.

STORAGE

Sandvik Formula Green should be stored indoors at room temperature. The packages should be kept upright and closed and stored with no access for unauthorized personnel.

The shelf life of unopened pickling paste is 3 years. The shelf life of an opened package is 1 year, on condition that the package is carefully closed after use.

INSTRUCTIONS FOR USE

1. Remove as much slag, oxide and weld defects as possible. A stainless steel wire brush is recommended. If necessary, wash off dirt, oil, grease and paint which could impede the pickling process
2. Working temperature between +5 to +40°C (+41 to +104°F)
3. Shake Sandvik Formula Green pickling paste well before use
4. Apply a relatively thick layer of paste with the accompanying brush. Longer pickling times apply for higher alloy steels.
5. Remove the pickling paste (pickling residue must be neutralized to pH 7 (Sandvik Neutralization paste).

Carefully brush underlying oxides away with a damp stainless steel wire brush

6. Flush with a generous amount of water. No pickling paste or pickling paste residue must be left after flushing
7. Leave the pickled structure to air dry, to allow the passivated layer to be re-formed on the welded (pickled) areas

Local regulations apply to the use of flushing water. The flushing water contains acid remnants and heavy metals

PHYSICAL PROPERTIES

We require your consent

We use cookies to personalise content and ads, to provide social media features and to analyse our traffic. We also share information about your use of our site with our social media, advertising and analytics partners. Please set your preferences in Cookie Settings and visit our Cookie Policy for more information on how and why cookies are used on this site.

[Cookie Settings](#)

✓ Accept Cookies